

PUSEN


# Single Use Flexible Video Ureteroscope

7.5F PU3033A



# 7.5 Fr

Lower RESD (Ratio of Endoscope-Sheath Diameter), Higher Irrigation  
Lower Complication Rate, Higher Stone-Free Rate

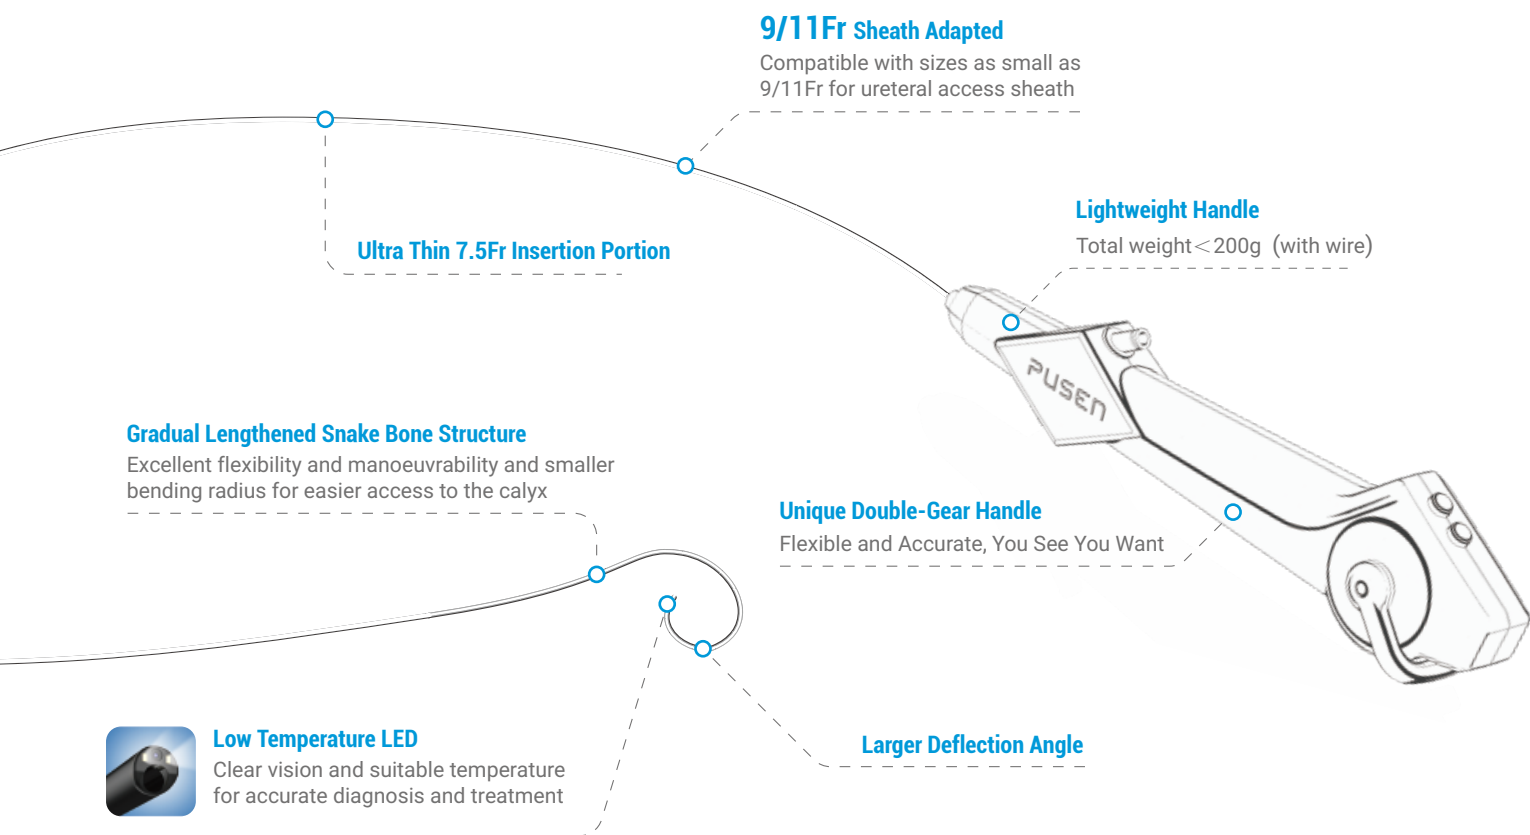

**PU3033A facilitated intrarenal pressure maintaining in a safe threshold ( $\leq 25.90$  cmH<sub>2</sub>O) and optimal irrigation flow (47.7 mL/min)**

## Specification

Model	Insertion Tube Diameter	Bending Angle	Field of View	Minimum Instrument Channel Width	Custom Buttons
PU3033A	7.5 Fr	U/D 270°	120°	3.6 Fr	2

**PUSEN Endoscope**  
**R&D and Production Base**

**PUSEN**

**Zhuhai Pusen Medical Technology Co., Ltd.**

5/F, Building 1, No 33, Keji San Road,  
High-tech Zone, Tangjiawan Town,  
519085 Zhuhai, Guangdong, People's Republic of China  
(86) 400-688-2023

Rev.202402

